
WB111



WB111/25 WB111/19 roller stopper






WB113



WB113/R,for right side WB113/L,for left right glass door holder



WB114



glass door guide






WB115




WB115/25 for 25mm bar WB115/19 for 19mm bar bracket/support washer,for fixing against to wall/glass use for keeping level thickness:1mm/2mm/3mm

0

Serial A track bar instruction





Complete with tube track bar

Α	В	C(QTY)	D
2000	950	3	750~1000
2330	750	4	1000~1200

Capacity 80kgs

Sliding door system use for glass door thickness 8-12mm


- A: track bar total long
- B: fixing point distance
- C: fixing point (use for counting quantity)
- D: door width(mm)

Complete with solid track bar

Α	В	C(QTY)	D
2100	900	3	750~1000
2400	750	4	1000~1200
2600	750	4	1210~1400

Capacity 120kgs






TR02/25 TR02/19

track roller, for glass door, for 25 mm bar track roller, for glass door, for 19mm bar

WB203






roof support for double door , WB203/25 for 25mm bar WB20319 for 19mm bar

WB201




WB201/25,for 25mm bar WB201/19,for 19mm bar fixing bracket to wall



WB107




WB017/25 for 25mm bar WB017/19 for 19mm bar tube end plug



WB202




WB202/25 for 25mm bar WB202/19 for 19mm bar fixing bracket to glass



WB111



WB111/25 WB111/19 roller stopper



WB114




glass door guide








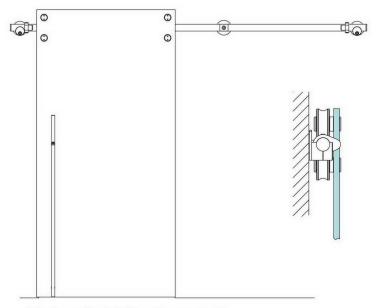

1.front mounting to brick wall or wood wall

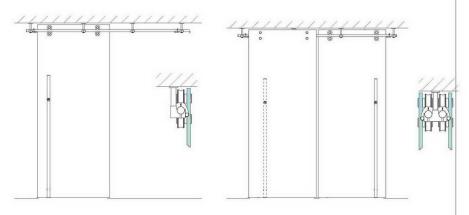


2. mounting to roof


3. mounting to roof, double door





for 25mm bar track roller, for wood door




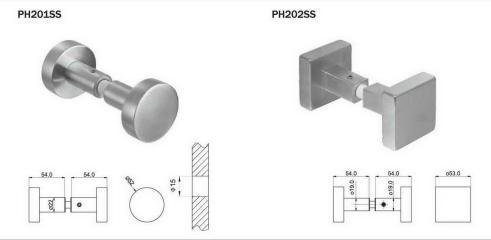


TR03/19




for19 mm bar track roller, for wood door










WB301



door guide for wood door









PH206SS

